









Level P-1

Located

57′

Below Grade

Saw-cutting... 2,680 lf Slab Demolition... 7,360 sf

Concrete Debris...4,600 cf (170 CY)

Soil Excavated...5,360 cf (200 CY)

CR6 ... 224 tons Concrete... 46 CY PVC Pipe...1,370 lf

Steel Pipe...18 If

Cleanouts...18 ea

Area Drains 15" x 15"... 14 ea

Water stop...2,680 If

Dowels # 4 bar...2,680 each

All materials transported via multiple bobcat, with traffic control in an active parking garage. Traffic Signage and Flagmen provided


Refurbished Below Grade Drainage Systems










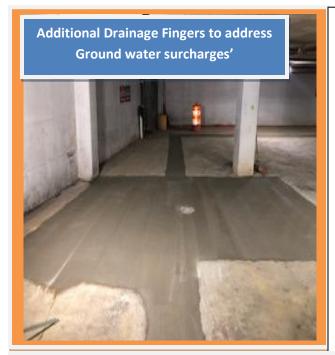





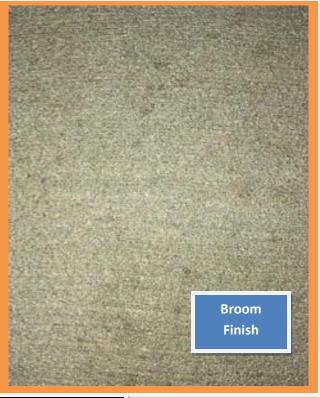

Total Project Finished in 5 Weeks